




www.tenavgroup.com
@TENAVGROUP
FB:tenavgroupthailand

Features

Distribution

Sound field distribution is shown with equal-loudness contours for a standard 1kHz tone. The center area is loudest at 100% amplitude, while the sound level just outside the illustrated beam area is less than 10%

The maximum performance is attained at roughly 1-2m from the listener.

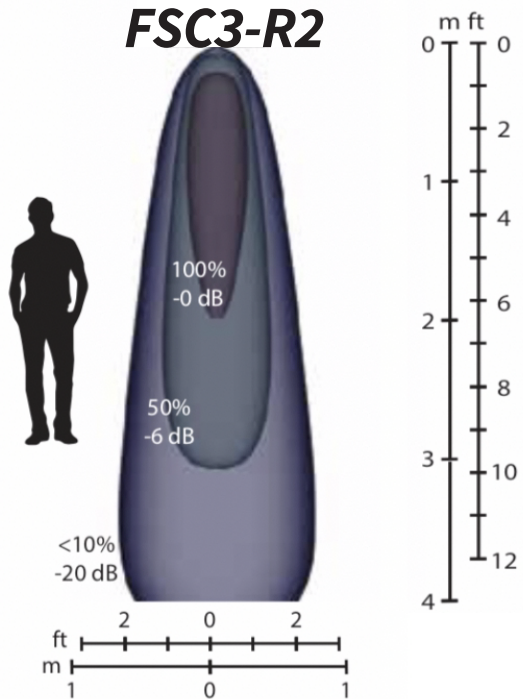

Specification




Directional Speaker FSC3-R2

*2 in 1
Speaker+Amplifier
Embedded
VESA
Flexible Application*

FSC3-R2	
Dimension	ø243x54mm
SPL	85dB@1KHz/2m
Power Input	24VDC/3A
Weight	850g
Working Temperature	-15°-45°
Humidity	0-90%
Available Color	Silver

TIS Directional Speaker



providing headphone-like experience and yet preserve the quiet.



: 02-463-0710
: www.tis-pro.com

29/99 Moo.11 Prarajviriyaporn Road, Bangpueng Sub-district, Prapradaeng Samutprakarn 10130