


WALL-HDBT-70TR-LITE

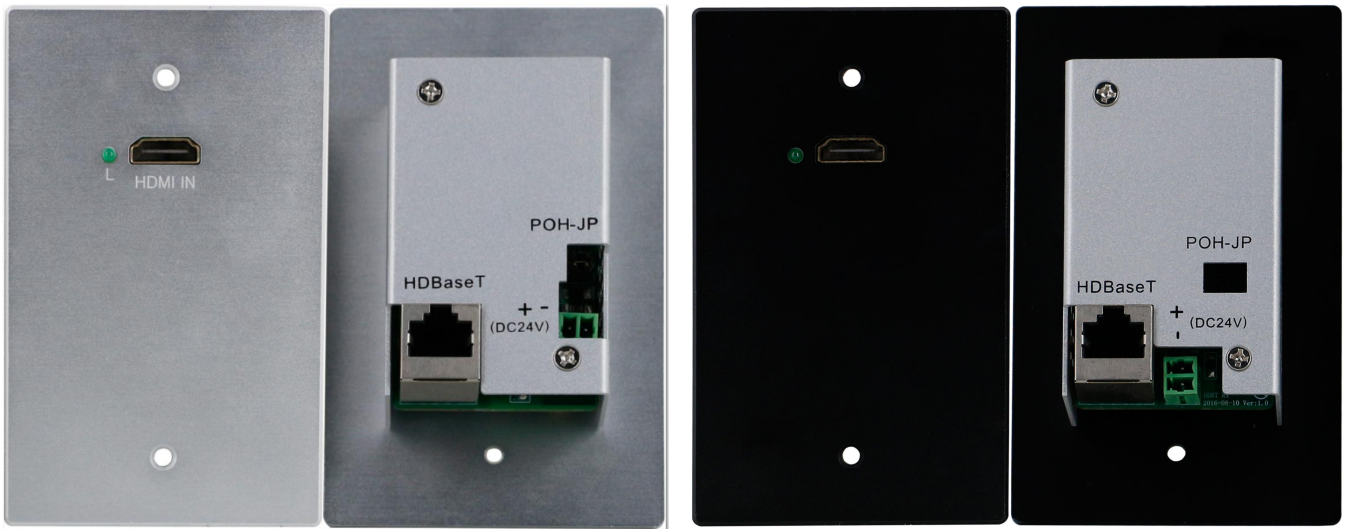


WALL-HDBT-70TR-LITE is an HDBaseT Wallplate transmitter & receiver, it can support 1*HDMI input, 1*HDBaseT(RJ45) output. The resolution can up to 4k, with the POC(power over cable) function, users can only power on the HDBaseT receiver. For the transmission distance it can up to 70m at 1080P, and for 4K, it can up to 40m. It's popularly used in the small meeting room, classroom or other long distance transmission applications.

Features

- Supports 1080P 3D, and up to 4K
- Supports HDCP compliant
- Transmission distance: 70m at 1080P, 40m at 4K via Cat5e/Cat6
- Supports POC(power over Cable) function
- Support one HDMI input
- LED working indicator

Diagram

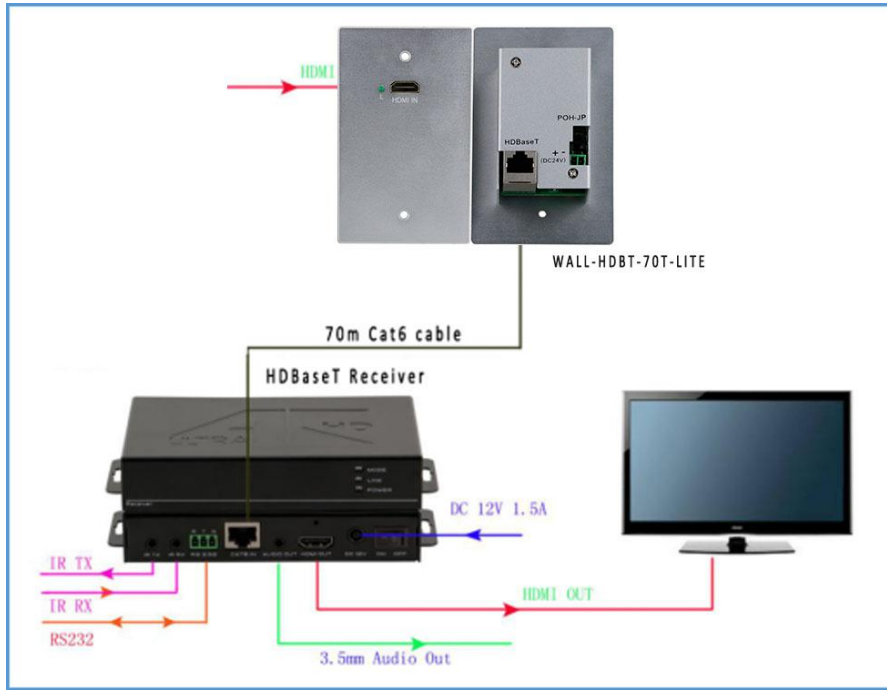

Specifications

| Model | WALL-HDBT-70TR-LITE |
|-----------------------|---|
| Product Name | Lite version HDMI Wallplate transmitter |
| Input | 1*HDMI |
| Output | 1*HDBaseT(RJ45) |
| Transmission distance | 70m at 1080P, 40m at 4K via Cat5e/Cat6 |
| Bandwidth | 10.2Gbps |
| Power Supply | DC 24V 1.25A |
| Dimension (WxHxD) | 115*70*28mm |
| Weight | 40g |
| Operating Temperature | -10°C to 40°C |
| Storage Temperature | -25°C to 55°C |