WALL-HDBT-70TR-LITE








WALL-HDBT-70TR-LITE is an HDBaseT Wallplate transmitter & receiver, it can support 1*HDMI input, 1*HDBaseT(RJ45) output. The resolution can up to 4k, with the POC(power over cable) function, users can only power on the HDBaseT receiver. For the transmission distance it can up to 70m at 1080**P 60Hz,1080i 60Hz**, and for 4K, it can up to 40m. It's popularly used in the small meeting room, classroom or other long distance transmission applications.

Features

- ➤ Supports HDMI 1080P 3D,(Deep Color) HDCP compatible and up to 4K2k
- > Supports HDCP compliant
- > Transmission distance: 70m at 1080P 60Hz, 1080i 60Hz, 40m at 4K via Cat5e/Cat6
- > Supports POC(power over Cable) function
- > Support one HDMI input
- > LED working indicator

Diagram

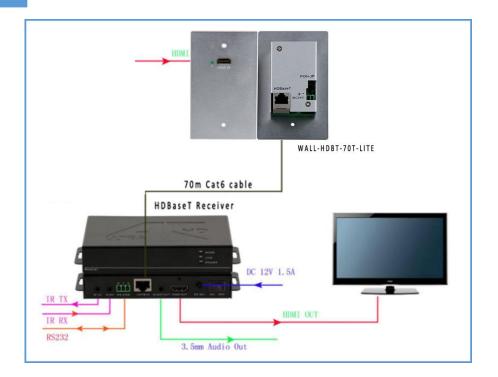

Specifications

Model	WALL-HDBT-70TR-LITE
Product Name	Lite version HDMI Wallplate transmitter
Input	1*HDMI
Output	1*HDBaseT(RJ45)
Transmission distance	70m at 1080P 60Hz , 1080i 60Hz , 40m at 4K via Cat5e/Cat6
Bandwidth	10.2Gbps
Power Supply	DC 24V 1.25A
Dimension (WxHxD)	115*70*28mm
Weight	40g
Operating Temperature	-10°C to 40°C
Storage Temperature	-25°C to 55°C