


TSV-SPH05 1x4 HDBaseT™ Splitter-70m

Support 40m(130ft) 4K@60HZ 4:4:4, 70m(230ft) 1080P,
1x Loopout, bi-directional IR , POC and downscaler from 4K to 1080P

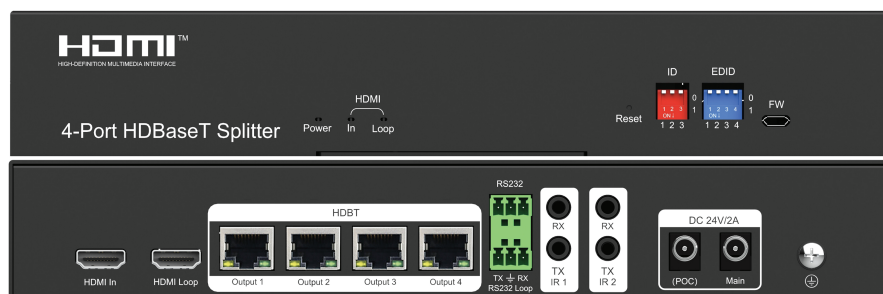

Features

- : Advanced HDBaseT™ technology offering distribution of video and audio over a single CAT cable
- : 1x HDMI Loop out & 1x RS232 Loop out for integrating local displays or cascading to multiple devices
- : Supports HDMI2.0 18Gbps,HDR10, 4k@60HZ 4:4:4
- : Support downscaler from 4K to 1080P
- : Extends HDMI 1080p up to a distance of 70m/230ft over single CAT cable
- : Extends HDMI 4K up to a distance of 40m/130ft over single CAT cable
- : Supports PoC (Power over Cable) to power compatible HDBaseT receivers
- : Supports Dolby TrueHD, Dolby Atmos, Dolby Digital Plus and DTS-HD Master Audio transmission
- : Supports HDCP2.2/1.4 Compliant
- : Advance EDID Management
- : 1 set including 1 x TSV-SPH05 and 4 x HDBasT Receiver (TSV-EX53-RX)

Specification

Operating Temperature Range	-5 to +40°C(+23 to +104°F)
Operating Humidity Range	5 to 90%RH (No Condensation)
Input Video format	720P / 1080P / 4K@60hz
Data transfer speed rate	18 Gbps(Maximum)
Input port	1xHDMI
Output ports	4xHDBaseT port, 1xHDMI loop out
Output Video Format Supported	DTV/HDTV:480i/576i/480P/576P/720P/1080i/1080P, 4K VESA resolution:1920x1200
Transmission Distance	70m under 1080P 40m under 4K
Power consumption	15W(HOST); 30 W(POC)
Dimension (L×W×H)	270x190x44mm
Net Weight	1640g



Note: the red arrow indicates the two-way 3.5mm infrared 3-section connector; The blue arrow indicates the direction of infrared in the product